

OZONE ANALYZER

GUX-390

This is an ozone (O₃) analyzer in ambient air that adopts the ultraviolet absorption method. The device ensures stable determination of a small amount of O₃ in atmosphere.




Characteristics

- The optional Ethernet interface unit enables data collection and remote control via LAN.
- The optional CF card records measurements recorded by an analyzer (instantaneous values and hourly average values), the status within an analyzer (temperature, pressure and flow rate), and the history of zero deviations, span coefficients, alarms and events.* Data is kept as CSV files in the CF card to facilitate data editing. Various types of data (e.g. minute values, hourly values, alarms and events) are classified into year- or month-wise groups for convenient data organizing.
- A CF card can record the following data volume (the device only accepts our official CF cards that are to be used exclusively for the device.)
Data example (256MB): Volume of Approximately 12 years (regular recording only)

Standard specifications


| | |
|-------------------------|--|
| Product name | : Ozone Analyzer |
| Model | : GUX-390 |
| Measurement object | : Ozone (O ₃) in ambient air |
| Measurement method | : Ultraviolet absorption method |
| Meas. range | : 0 to 0.1 / 0.2 / 0.5 / 1.0ppm (User selectable) |
| Unit | : ppm, ppb, mg/m ³ , µg/m ³ (selectable) |
| Analog Output | : 0 to 1VDC, 0 to 10VDC, 4 to 20mA (selectable) |
| Ranges | : (selectable) |
| Communication | : RS232C, Ethernet TCP/IP (option) |
| Linearity | : Within ±1% FS (indication error) |
| Repeatability | : Within ±1% FS |
| Minimum detection | : Within 0.5ppb (0.5% FS) sensitivity |
| Zero noise | : Within 0.5ppb |
| Stability | : Zero drift; within ±2ppb/day, within ±4 ppb/week Span drift; within ±1% FS/day, within ±2% FS/week |
| Response time | : Within 2minutes (90% response) |
| Effects of interference | : Effects of humidity (In the presence of components moisture at 25°C, 80%); ±4ppb or less Effects of toluene (In the presence of 1 ppm toluene); 4 ppb or less |
| Warm-up time | : Approx. 2hours |
| Ambient | : 0 to 40°C, RH 85% or less temperature/humidity |
| Power source | : 220VAC, 50/60Hz |
| Power consumption | : 150VA at maximum; 60W on average |
| Flow of sample in | : Approx. 1.8L/min (20°C, 1atm) ambient air |
| Outside dimensions | : 399 (W) x 520(D) x 216(H) mm without rubber legs |
| Weight | : Approx. 16kg |

Measurement system diagram

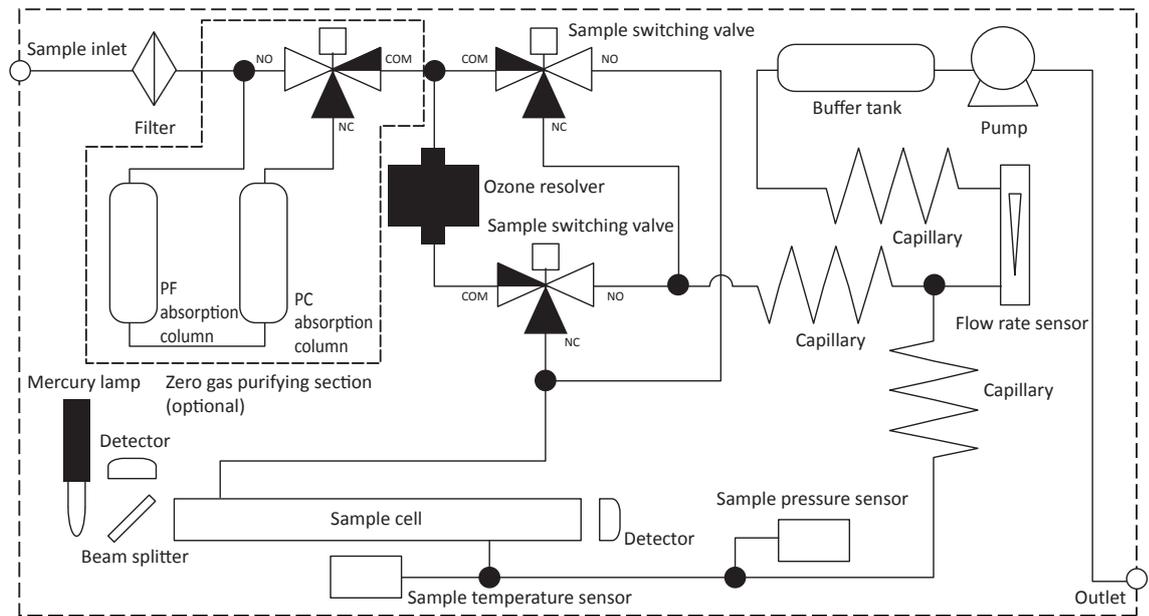

Dimensions

Unit : mm

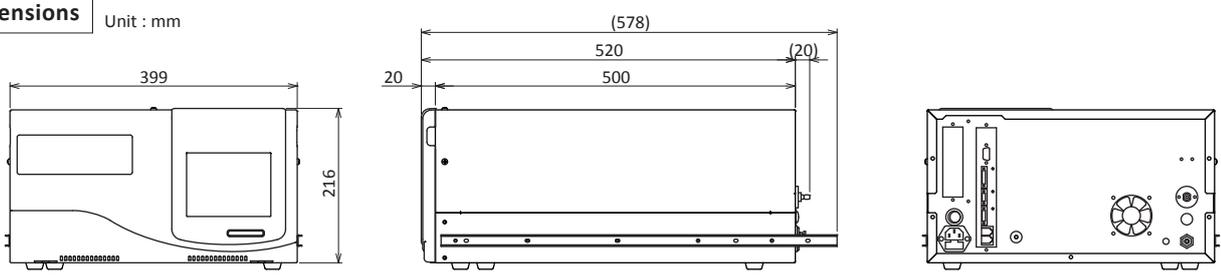

DKK-TOA CORPORATION



Please read the operation manual carefully before using products.

Overseas Sales Division:
 DKK-TOA Corporation
 29-10, 1-Chome, Takadanobaba, Shinjuku-ku,
 Tokyo 169-8648 Japan
 Tel : +81-3-3202-0225 Fax : +81-3-3202-5685
 E-mail : intsales@dkktoa.com



<https://www.toadkk.com/english/>

Information and specifications are subject to change without notice.